



INSTALLATION INSTRUCTIONS

Part Number YA-6006

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Air Filter seals properly.

INSTALLATION

1. Remove the stock air filter.
2. Remove the stock screws from the stock air filter. (Fig. 1)
3. Gently insert the stock screws into the K&N Air Filter. (Fig. 2)
4. Install the K&N Air Filter into the air box.
5. Starting with the rear middle stock screw #1, start all stock screws a couple of threads. (Fig. 3)
6. Go back and tighten the stock screws using a "criss cross" pattern. (Fig. 3)

Note: This ensures the K&N Air Filter is seating properly.

7. Re-install the stock air box lid and tighten the screws.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.



Fig. 1



Fig. 2

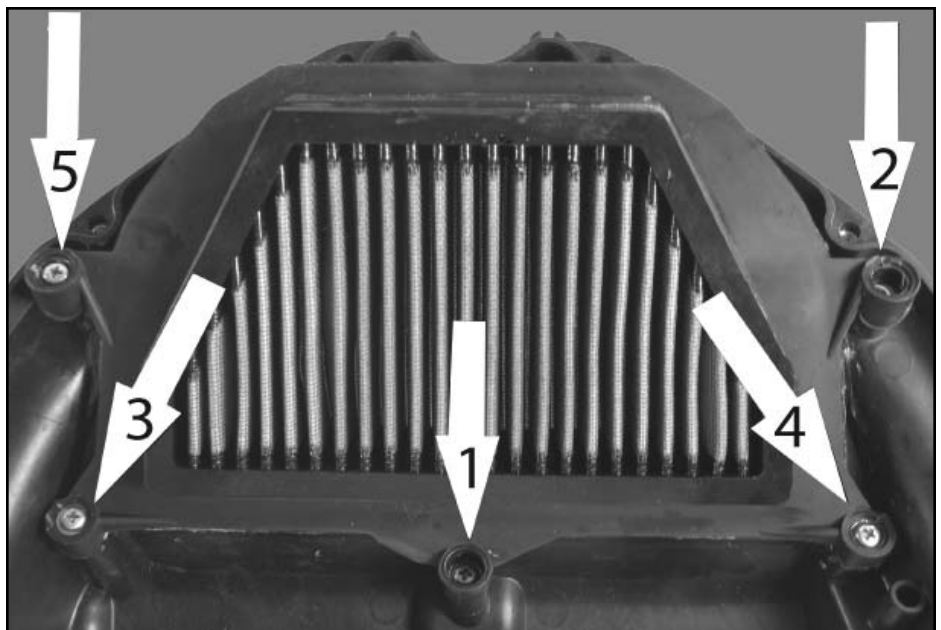


Fig. 3